

Figure C12.1 - Ford Motorcraft Distributor

* Inverted Ignition Signal - On LEM use 'I2', On LinkPlus/LinkPlus G2 use 'Ign Inv'.

CAS Supply - On LEM connect direct to +12V ignition switched source.

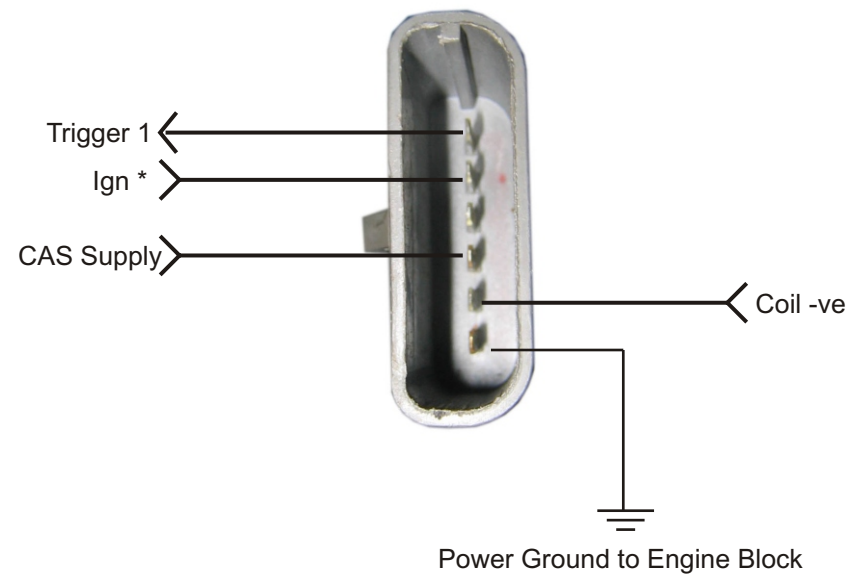


Figure C12.2 - Ford Motorcraft Distributor Wiring